

Webhooks

When creating or editing products on phpFox Store, developer can configure webhook URL in order for phpFox Store to transfer data after having purchases or installation.

DETAILS

- General
- Features
- Webhooks**
- Screenshots
- Changelog
- Installation
- FAQs

[Update](#)

[Manage Versions](#)

Webhooks

Successful Purchase URL

URL of where your product will be noticed once a client has successfully purchased it.


Uninstall Uri

URL of where your app will be noticed once a client has uninstalled it.

Here is the sample call request when having a new purchase:

```
{
  "client_id": "abc123",           // license key
  "endpoint": "http://site.com", // license url
  "client": {
    "email": "client@mail.com", // user email
    "full_name": "John Doe",
    "first_name": "John",
    "last_name": "Doe"
  },
  "invoice": {
    "id": "123456",           // order id
    "paid": "20",            // actual pay
    "time_stamp": "1528081828",
    "paypal": {
      "id": "tx123",         // transaction id
      "name": "John Doe",
      "paid_to": "expert_paypal@mail.com", // receiver PayPal email
      "paid_from": "paid_paypal@mail.com" // sender PayPal email
    }
  },
  "product": {
    "id": "123",             // product id
    "name": "My App"        // product name
    "type": "Application",  // product type Application, Theme, Language Pack, Package
    "paid": "20"            // product price
  }
}
```

If you sell a product in our store you can define webhooks, which get executed when a product of yours gets installed or uninstalled. To define these webhooks [log into](#) our store. Manage one of your products and click on **Webhooks**.

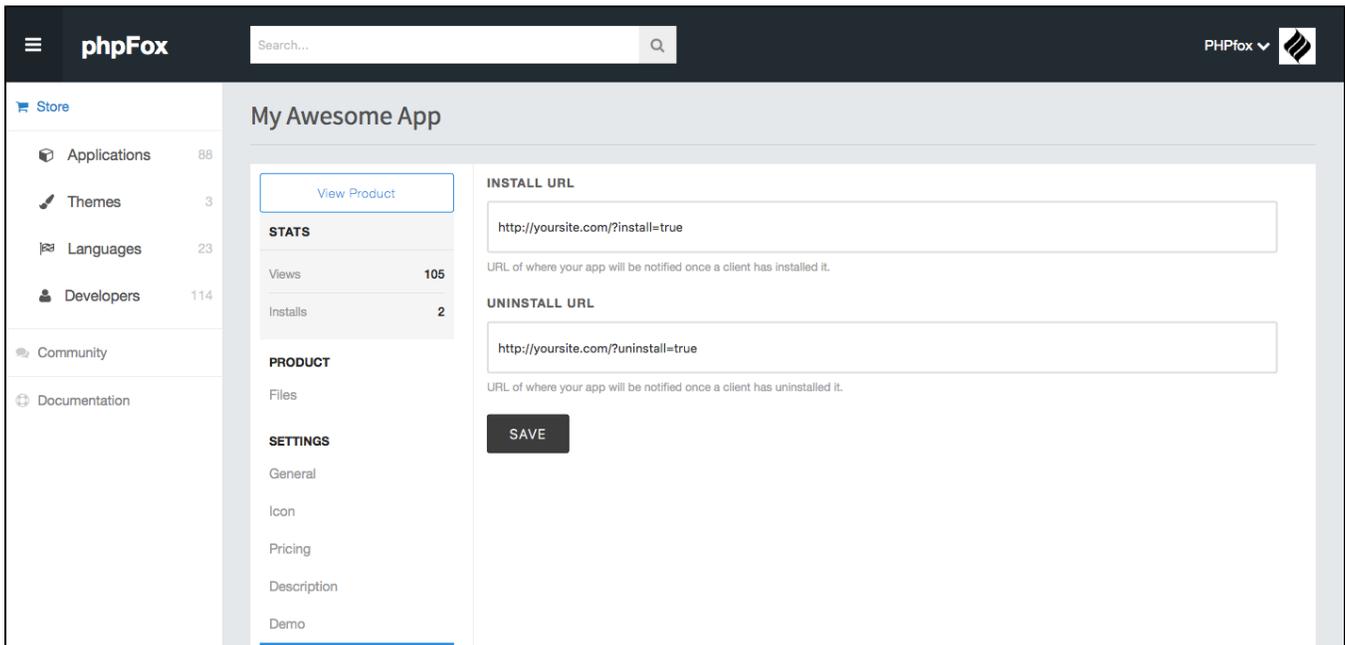

When a product has been installed or uninstalled by a client we send POST data, which include the following example

```
Array
(
    [client_id] => 895a20081f9b4bd525a45dae693f07fa
    [endpoint] => http://www.localhost.com/
    [client] => Array
        (
            [email] => client@email.com
            [first_name] => Raymond
            [last_name] => Benc
        )
    [product] => Array
        (
            [id] => 1226
            [paid] => 18
        )
    [auth] => Array
        (
            [id] => 454ddc73ae7e1fef2efc7fa7056d75f5
            [key] => 89f91f85ace75d1e5a314433e8e09b68
        )
)
```

Key	Type	Description
client_id	string	This is the unique client ID.
endpoint	string	URL to the clients site.
client	array	Clients details, which include their email, first & last name.
product	array	Includes what product the client installed and how much they paid (If free, it will be 0).
auth	array	This is the public and private key for your app, which you can identify as a valid webhook coming from our servers.